


KINELEC

10-18W DC-DC LED Driver

DCLDT-1

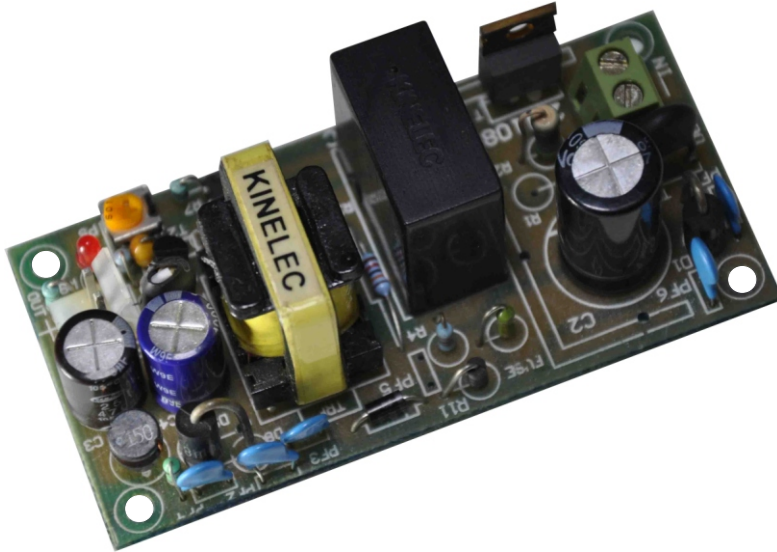

Features :

- Input voltage available 12-56VDC
- Protections: Short circuit/ OL/OV/CC
- Output available 16-60V DC
- Output connector
- Input connector
- Open PCB Card type
- 1 year limited warranty
- Available with IP-65, 66, 67

DC-DC LED DRIVER

(Also available in plastic housing)

Dimension 90 x 45 x 32 mm (L- W - H)

Wt. 150 gms. (Approx)

| MODEL No | VOLTAGE IN | VOLTAGE OUT | RATED CURRENT | RATED POWER | LED 1W |
|---------------|------------|-------------|---------------|-------------|--------------|
| KSE-DCLD18W01 | 10.5-15VAC | 32VDC | 350mA | 10W | 1X10 LED(S) |
| KSE-DCLD18W02 | 10.5-15VAC | 16VDC | 700mA | 10W | 1X5X2 LED(S) |
| KSE-DCLD18W03 | 10.5-15VAC | 38.4VDC | 350mA | 12W | 1X12 LED(S) |
| KSE-DCLD18W04 | 10.5-15VAC | 19.2VDC | 700mA | 12W | 1X6X2 LED(S) |
| KSE-DCLD18W05 | 10.5-15VAC | 45VDC | 350mA | 14W | 1X14 LED(S) |
| KSE-DCLD18W06 | 10.5-15VAC | 22.5VDC | 700mA | 14W | 1X7X2 LED(S) |
| KSE-DCLD18W07 | 10.5-15VAC | 51.2VDC | 350mA | 16W | 1X16 LED(S) |
| KSE-DCLD18W08 | 10.5-15VAC | 25.6VDC | 700mA | 16W | 1X8X2 LED(S) |
| KSE-DCLD18W09 | 10.5-15VAC | 57.6VDC | 350mA | 18W | 1X18 LED(S) |
| KSE-DCLD18W10 | 10.5-15VAC | 28.8VDC | 700mA | 18W | 1X9X2 LED(S) |
| KSE-DCLD18W11 | 16-21 | 32VDC | 350mA | 10W | 1X10 LED(S) |
| KSE-DCLD18W12 | 16-21 | 16VDC | 700mA | 10W | 1X5X2 LED(S) |
| KSE-DCLD18W13 | 16-21 | 38.4VDC | 350mA | 12W | 1X12 LED(S) |

In addition to the above voltage range, we can provide you with specific voltage as desired by you.

| | | | | | |
|---------------|-------|---------|-------|-----|--------------|
| KSE-DCLD18W14 | 16-21 | 19.2VDC | 700mA | 12W | 1X6X2 LED(S) |
| KSE-DCLD18W15 | 16-21 | 45VDC | 350mA | 14W | 1X14 LED(S) |
| KSE-DCLD18W16 | 16-21 | 22.5VDC | 700mA | 14W | 1X7X2 LED(S) |
| KSE-DCLD18W17 | 16-21 | 51.2VDC | 350mA | 16W | 1X16 LED(S) |
| KSE-DCLD18W18 | 16-21 | 25.6VDC | 700mA | 16W | 1X8X2 LED(S) |
| KSE-DCLD18W19 | 16-21 | 57.6VDC | 350mA | 18W | 1X18 LED(S) |
| KSE-DCLD18W20 | 16-21 | 28.8VDC | 700mA | 18W | 1X9X2 LED(S) |
| KSE-DCLD18W21 | 22-28 | 32VDC | 350mA | 10W | 1X10 LED(S) |
| KSE-DCLD18W22 | 22-28 | 16VDC | 700mA | 10W | 1X5X2 LED(S) |
| KSE-DCLD18W23 | 22-28 | 38.4VDC | 350mA | 12W | 1X12 LED(S) |
| KSE-DCLD18W24 | 22-28 | 19.2VDC | 700mA | 12W | 1X6X2 LED(S) |
| KSE-DCLD18W25 | 22-28 | 45VDC | 350mA | 14W | 1X14 LED(S) |
| KSE-DCLD18W26 | 22-28 | 22.5VDC | 700mA | 14W | 1X7X2 LED(S) |
| KSE-DCLD18W27 | 22-28 | 51.2VDC | 350mA | 16W | 1X16 LED(S) |
| KSE-DCLD18W28 | 22-28 | 25.6VDC | 700mA | 16W | 1X8X2 LED(S) |
| KSE-DCLD18W29 | 22-28 | 57.6VDC | 350mA | 18W | 1X18 LED(S) |
| KSE-DCLD18W30 | 22-28 | 28.8VDC | 700mA | 18W | 1X9X2 LED(S) |

In addition to the above voltage range, we can provide you with specific voltage as desired by you.